

Figure 1

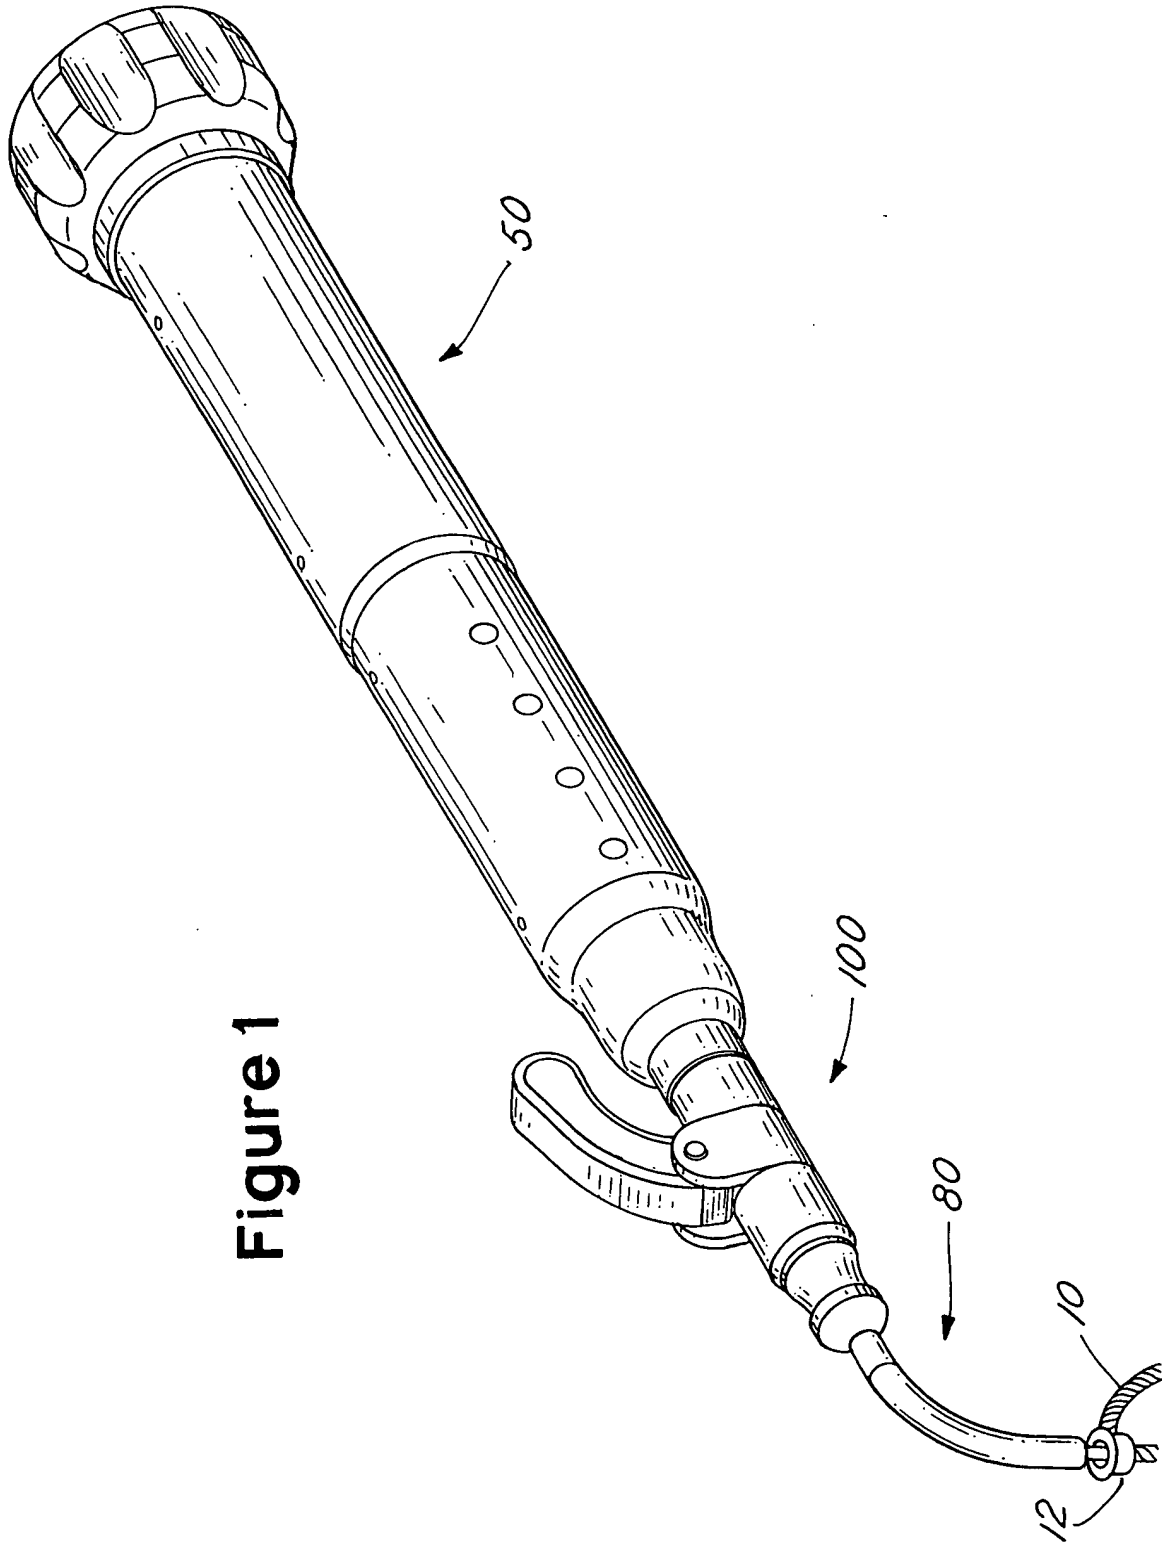


Figure 2

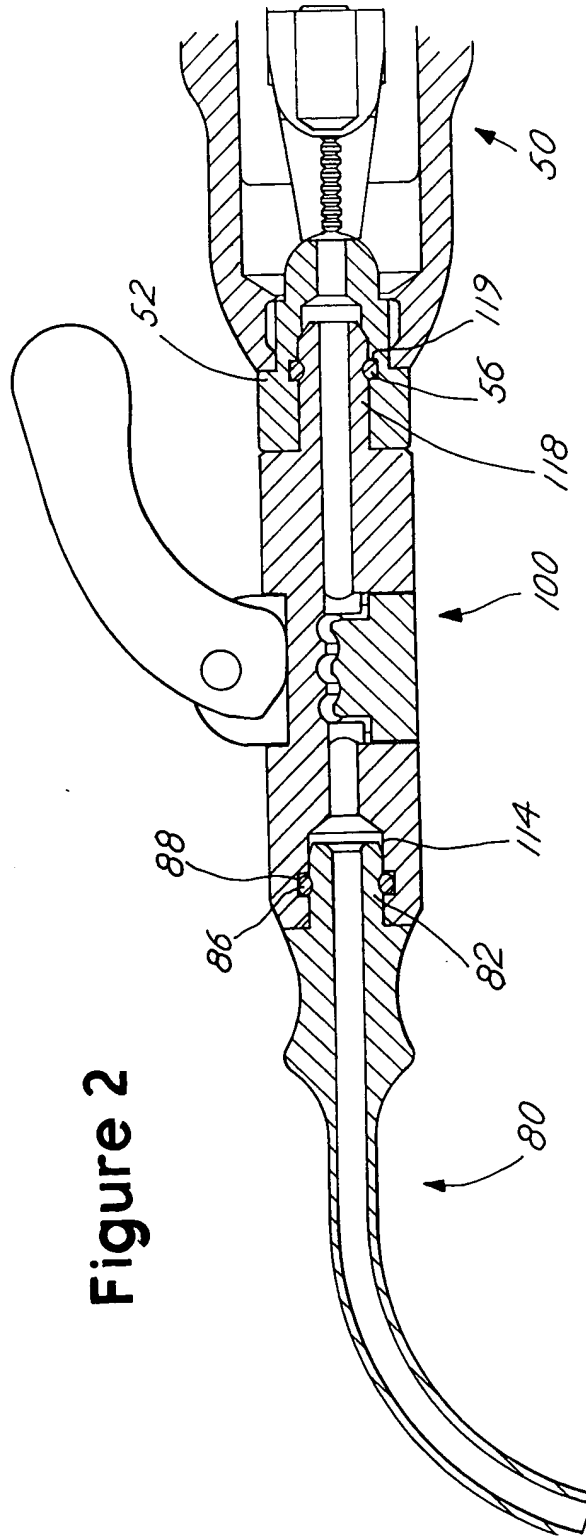


Figure 3A

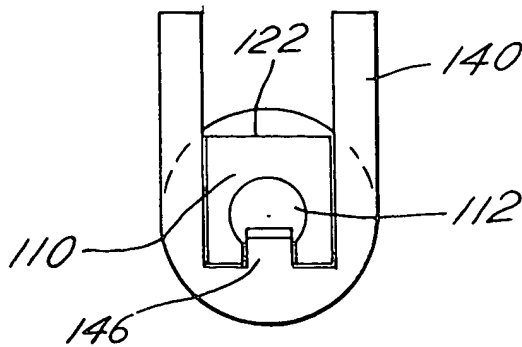
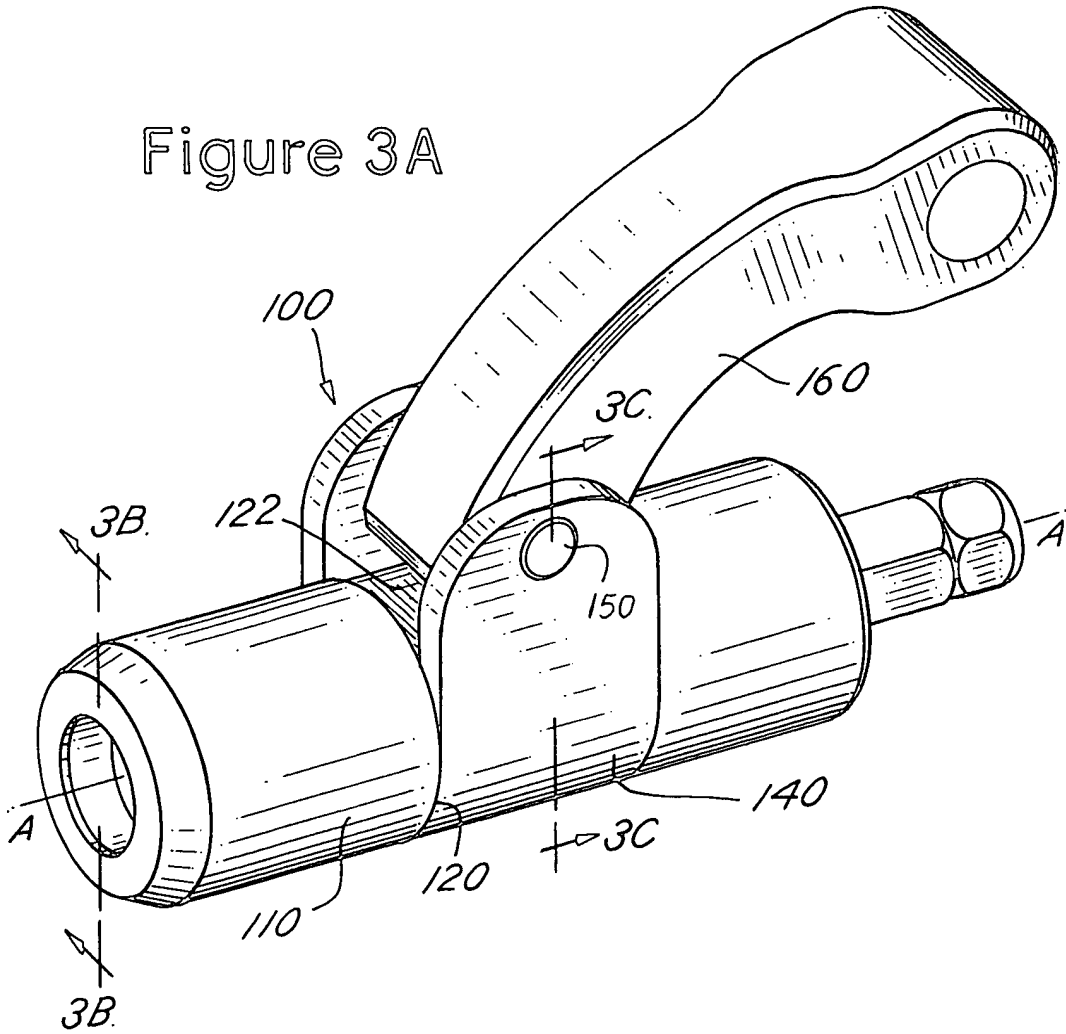


Figure 3C



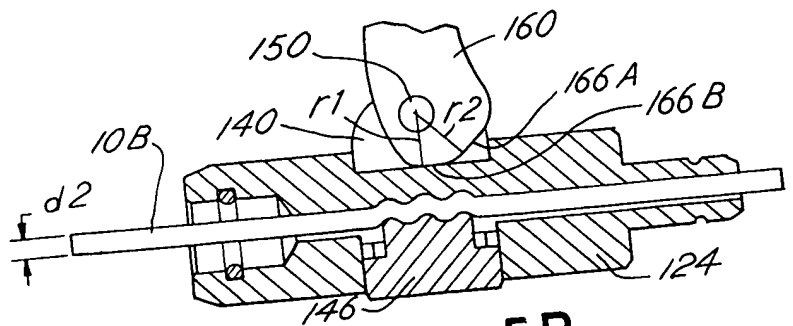
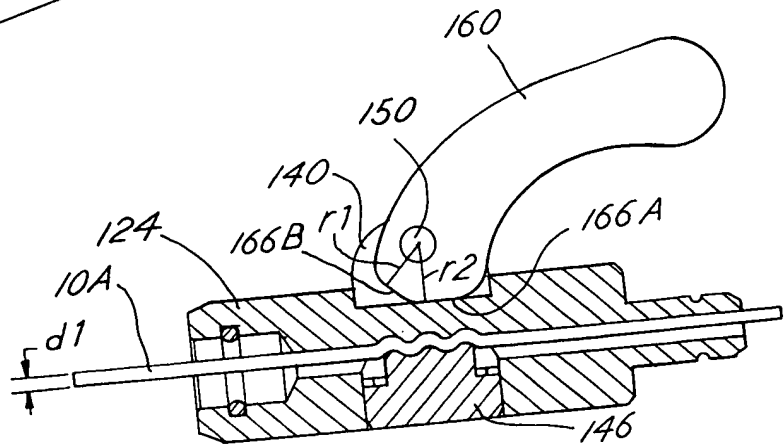
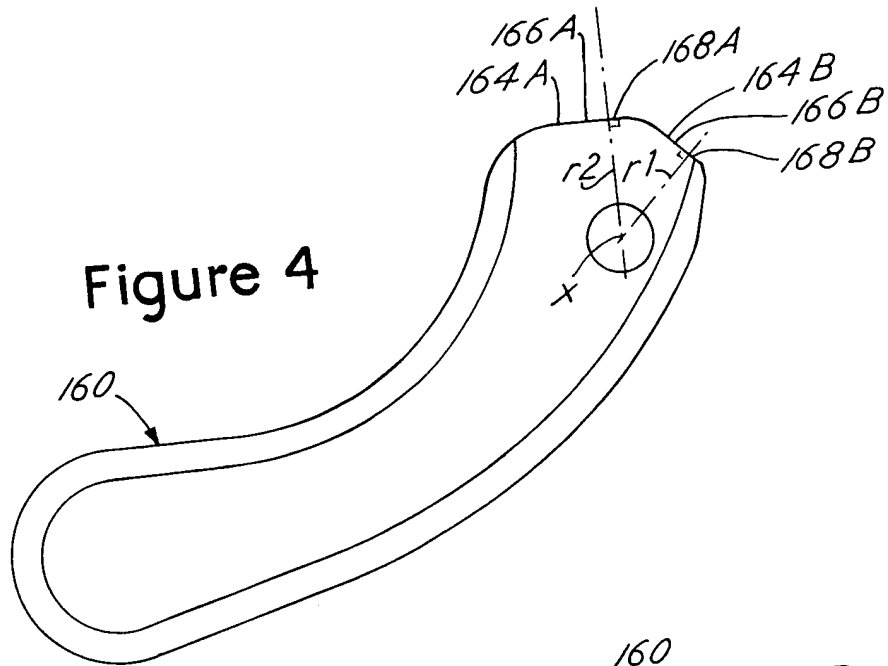


Figure 6


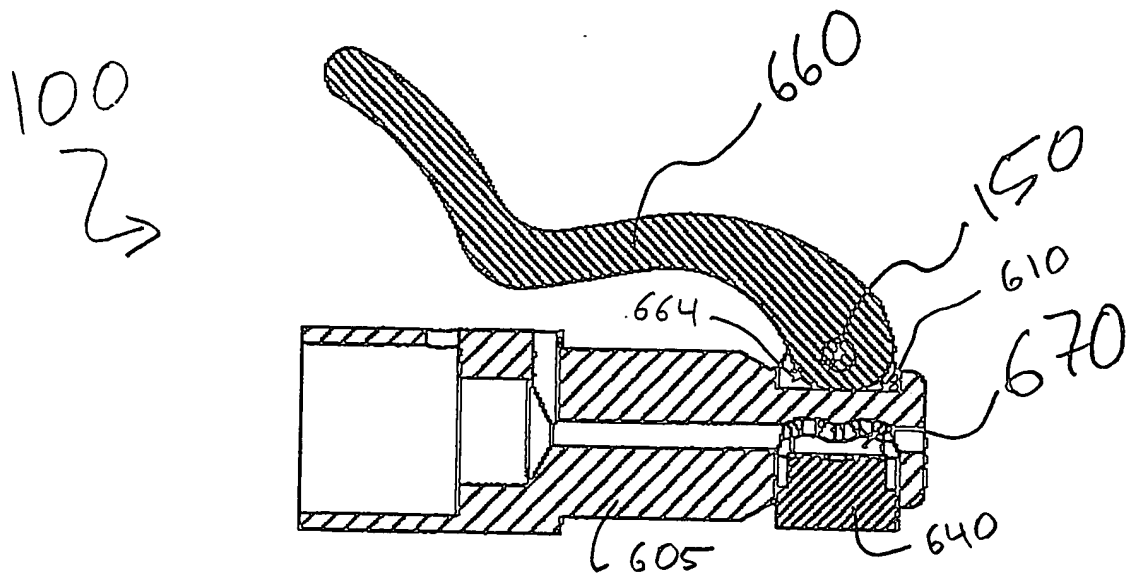


Figure 7A

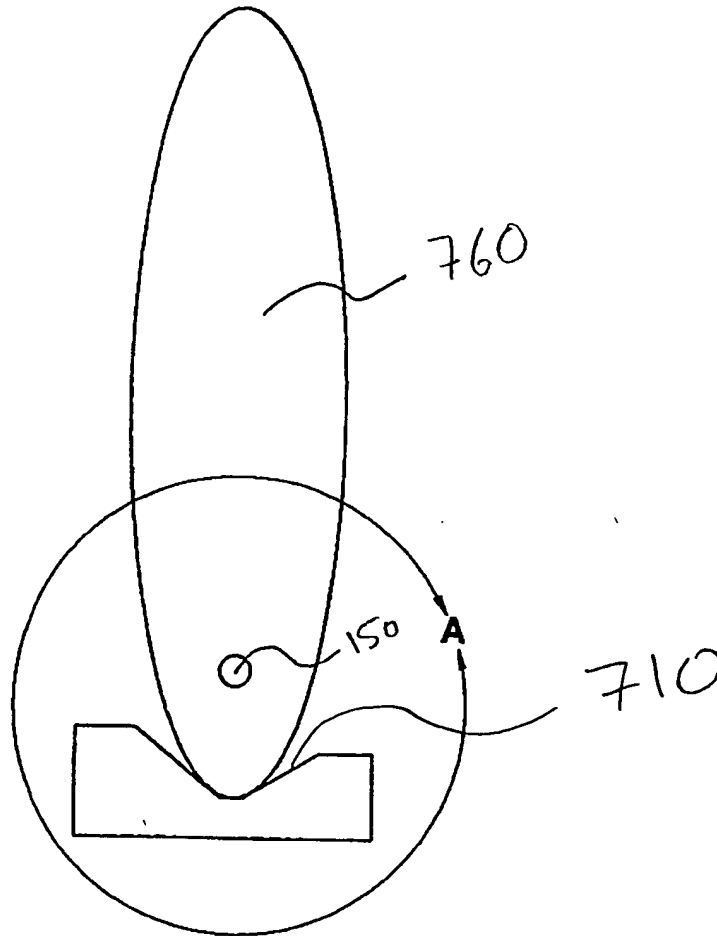

004608.00003

Figure 7B


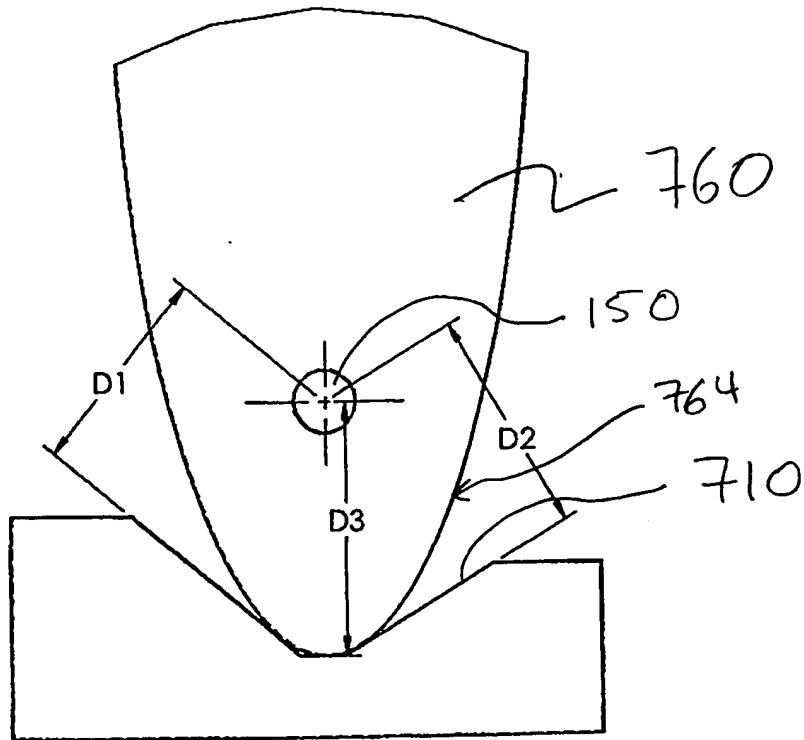




Figure 8

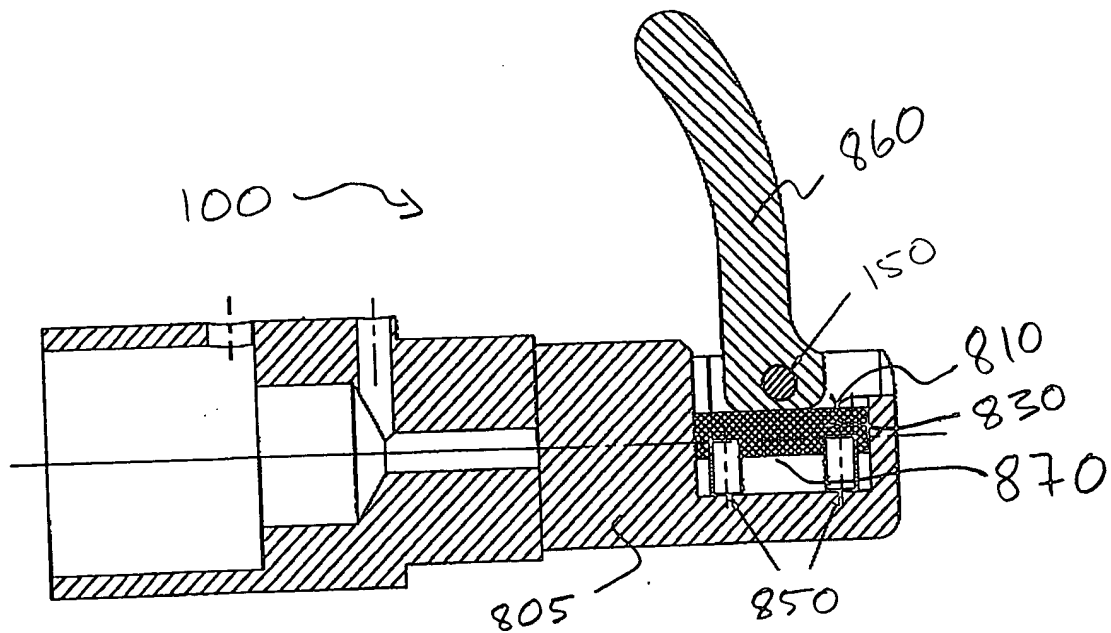

004608-11401

Figure 9

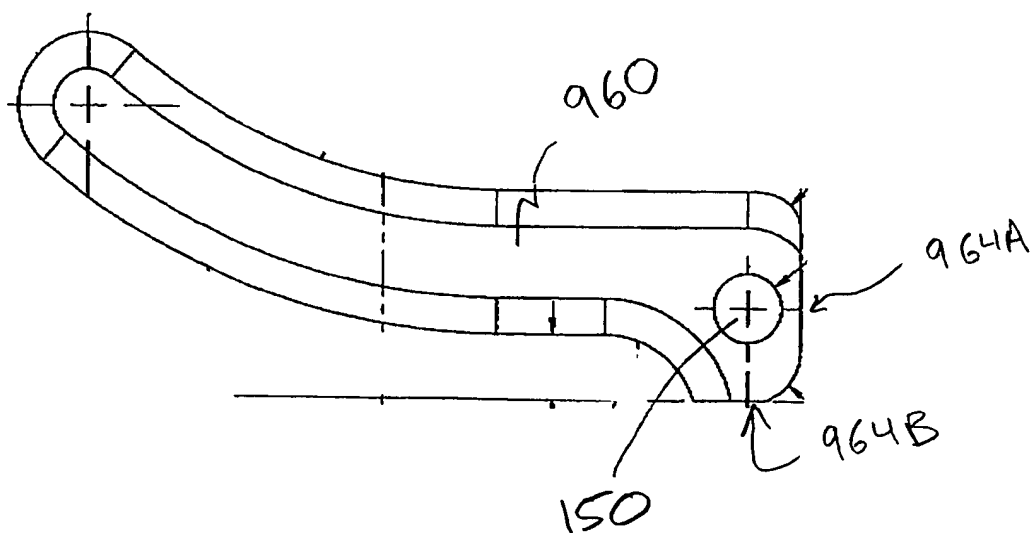


Figure 10

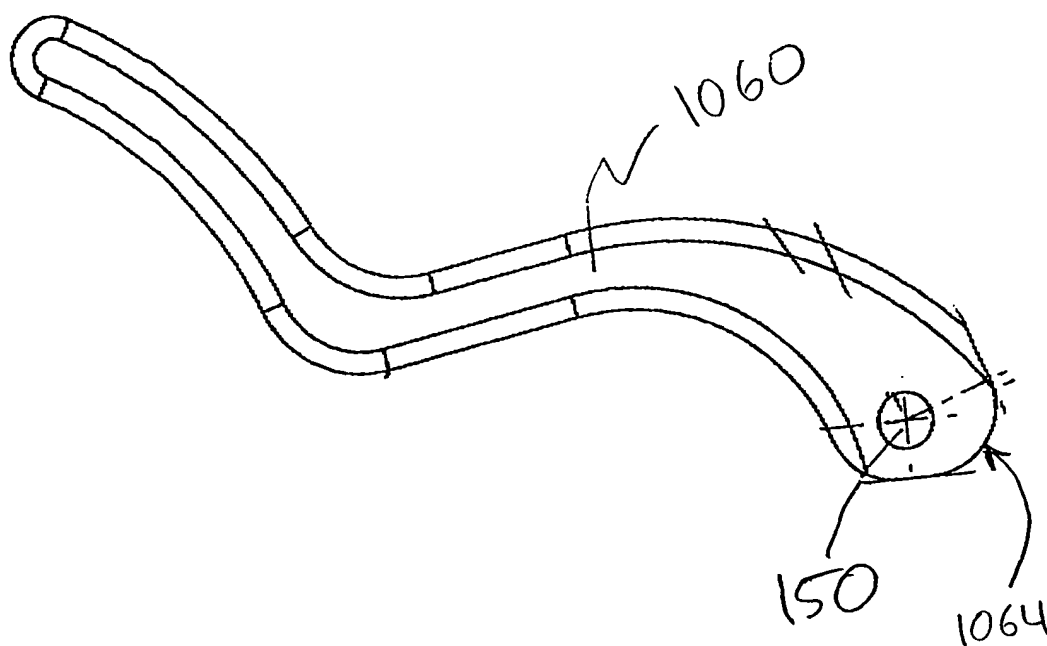


Figure 11

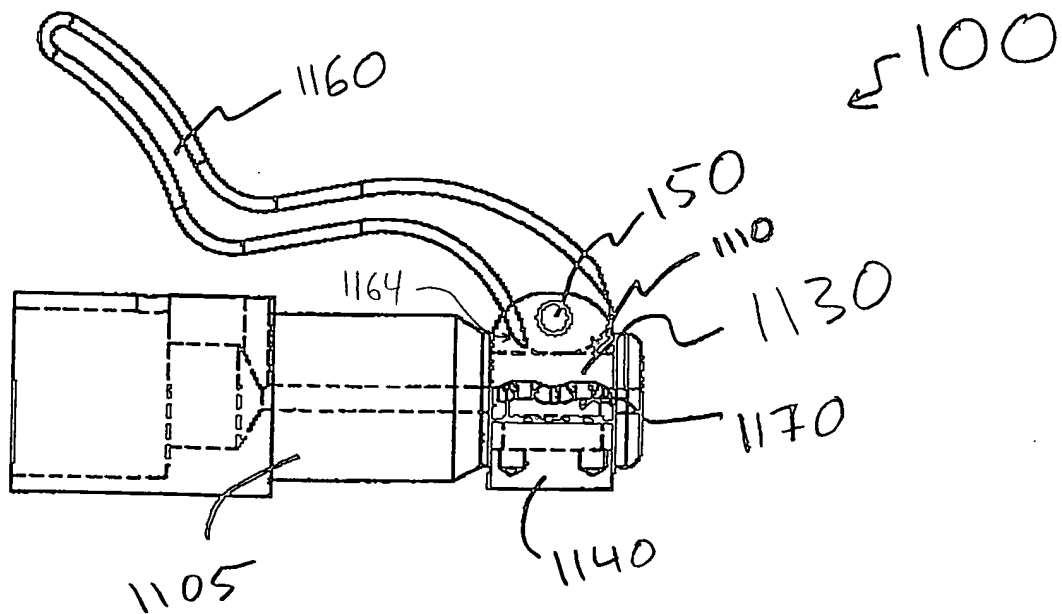


FIG. 11

Hand-drawn schematic diagram of a mechanical assembly 100. The assembly includes a central component 150 with a circular feature 1256A. To the left is a block 1250 with a vertical slot 1210 and a horizontal slot 1270. To the right is a block 1205 with a horizontal slot 1264. A cable 1260 is connected to the central component. A bracket 1240 is at the bottom. Various other parts are labeled with numbers like 1256B, 1260, 1205, 1270, 1210, 1250, 150, and 100.